


# Selina Class 10 ICSE Solutions Physics :

## Chapter 3- Machines

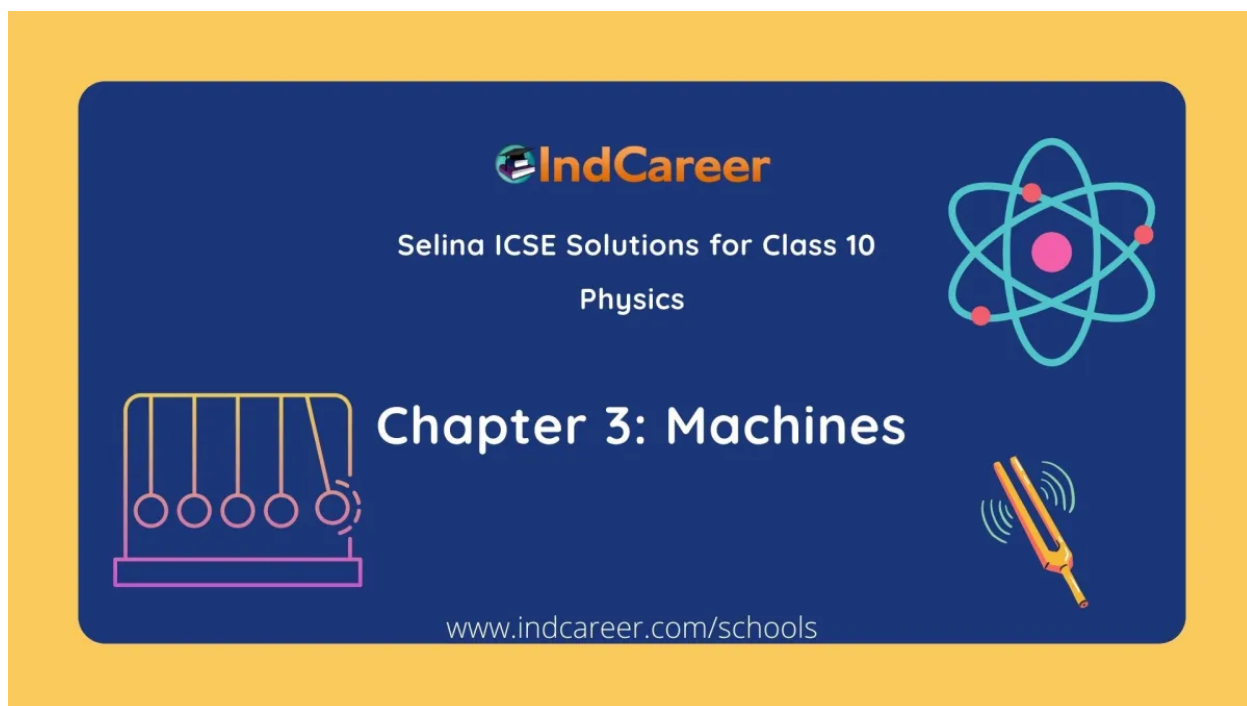

For any clarifications or questions you can write to **info@indcareer.com**

### Postal Address

IndCareer.com, 52, Shilpa Nagar, Somalwada Nagpur - 440015  
Maharashtra, India

**WhatsApp:** +91 9561 204 888, **Website:** <https://www.indcareer.com>

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>



# Selina Class 10 ICSE Solutions Physics :

## Chapter 3- Machines

Class 10: Physics Chapter 3 solutions. Complete Class 10 Physics Chapter 3 Notes.

### Selina Class 10 ICSE Solutions Physics : Chapter 3- Machines

Selina 10th Physics Chapter 3, Class 10 Physics Chapter 3 solutions

#### Solution 1.

(a) A machine is a device by which we can either overcome a large resistive force at some point by applying a small force at a convenient point and in a desired direction or by which we can obtain a gain in the speed.

(b) An ideal machine is a machine whose parts are weightless and frictionless so that which there is no dissipation of energy in any manner. Its efficiency is 100%, i.e. the work output is equal to work input.

#### Solution 2.

Machines are useful to us in the following ways:

1. In lifting a heavy load by applying a less effort.
2. In changing the point of application of effort to a convenient point.
3. In changing the direction of effort to a convenient direction.
4. For obtaining a gain in speed.

#### Solution 3.

(a) To multiply force: a jack is used to lift a car.

(b) To change the point of application of force: the wheel of a cycle is rotated with the help of a chain by applying the force on the pedal.

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

(c) To change the direction of force: a single fixed pulley is used to lift a bucket full of water from the well by applying the effort in the downward direction instead of applying it upwards when the bucket is lifted up without the use of pulley.

(d) To obtain gain in speed: when a pair of scissors is used to cut the cloth, its blades move longer on cloth while its handles move a little.

**Solution 4.**

The purpose of jack is to make the effort less than the load so that it works as a force multiplier.

**Solution 6.**

The ratio of the load to the effort is called mechanical advantage of the machine. It has no unit.

**Solution 7.**

The ratio of the velocity of effort to the velocity of the load is called the velocity ratio of machine. It has no unit.

**Solution 8.**

For an ideal machine mechanical advantage is numerically equal to the velocity ratio.

**Solution 9.**

It is the ratio of the useful work done by the machine to the work put into the machine by the effort.

In actual machine there is always some loss of energy due to friction and weight of moving parts, thus the output energy is always less than the input energy.

**Solution 10.**

(a) A machine acts as a force multiplier when the effort arm is longer than the load arm. The mechanical advantage of such machines is greater than 1.

(b) A machine acts a speed multiplier when the effort arm is shorter than the load arm. The mechanical advantage of such machines is less than 1.

It is not possible for a machine to act as a force multiplier and speed multiplier simultaneously. This is because machines which are force multipliers cannot gain in speed and vice-versa.

**Solution 11.**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

Mechanical advantage is equal to the product of velocity ratio and efficiency.

$$M.A = \eta \times V.R$$

For a machine of a given design, the velocity ratio does not change.

### Solution 12.

Let a machine overcome a load  $L$  by the application of an effort  $E$ . In time  $t$ , let the displacement of effort be  $d_E$  and the displacement of load be  $d_L$ .

$$\text{Work input} = \text{Effort} \times \text{displacement of effort} = E \times d_E$$

$$\text{Work output} = \text{Load} \times \text{displacement of load} = L \times d_L$$

$$\text{Efficiency } \eta = \frac{\text{work output}}{\text{work input}}$$

$$\eta = \frac{L \times d_L}{E \times d_E} = \frac{L}{E} \times \frac{1}{d_E/d_L}$$

$$\text{But } \frac{L}{E} = M.A$$

$$\frac{d_E}{d_L} = V.R$$

$$\eta = \frac{M.A}{V.R}$$

$$M.A = \eta \times V.R$$

Thus, mechanical advantage of a machine is equal to the product of its efficiency and velocity ratio.

### Solution 13.

The mechanical advantage for an actual machine is equal to the product of its efficiency and velocity ratio.

$$M.A. = V.R. \times \eta$$

The efficiency of such a machine is always less than 1, i.e.  $\eta < 1$ . This is because there is always some loss in energy in form of friction etc.

### Solution 14.

This is because the output work is always less than the input work, so the efficiency is always less than 1 because of energy loss due to friction.

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

$$M.A = V.R \times \eta$$

**Solution 15.**

A lever is a rigid, straight or bent bar which is capable of turning about a fixed axis.

Principle: A lever works on the principle of moments. For an ideal lever, it is assumed that the lever is weightless and frictionless. In the equilibrium position of the lever, by the principle of moments,

Moment of load about the fulcrum = Moment of the effort about the fulcrum.

**Solution 16.**

$$M.A = \frac{\text{Effort arm}}{\text{Load arm}}$$

This is the expression of the mechanical advantage of a lever.

**Solution 17.**

The three classes of levers are:

1. Class I levers: In these types of levers, the fulcrum F is in between the effort E and the load L. Example: a seesaw, a pair of scissors, crowbar.
2. Class II levers: In these types of levers, the load L is in between the effort E and the fulcrum F. The effort arm is thus always longer than the load arm. Example: a nut cracker, a bottle opener.
3. Class III levers: In these types of levers, the effort E is in between the fulcrum F and the load L and the effort arm is always smaller than the load arm. Example: sugar tongs, forearm used for lifting a load.

**Solution 18.**

(a) More than one: shears used for cutting the thin metal sheets.

(b) Less than one: a pair of scissors whose blades are longer than its handles.

**Solution 19.**

When the mechanical advantage is less than 1, the levers are used to obtain gain in speed. This implies that the displacement of load is more as compared to the displacement of effort.

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

**Solution 20.**

A pair of scissors and a pair of pliers both belong to class I lever.

A pair of scissors has mechanical advantage less than 1.

**Solution 21.**

A pair of scissors used to cut a piece of cloth has blades longer than the handles so that the blades move longer on the cloth than the movement at the handles.

While shears used for cutting metals have short blades and long handles because as it enables us to overcome large resistive force by a small effort.

**Solution 22.**

(a) The weight  $W$  of the scale is greater than  $E$ .

It is because arm on the side of effort  $E$  is 30 cm and on the side of weight of scale is 10 cm. So, to balance the scale, weight  $W$  of scale should be more than effort  $E$ .

(b)

$$MA = \frac{\text{Effort arm}}{\text{Load arm}}$$

Here, Effort arm = 30 cm

Load arm = 10 cm

$$\therefore M.A. = \frac{30}{10} = 3$$

**Solution 23.**


Class II lever always have a mechanical advantage more than one.

Example: a nut cracker.

To increase its mechanical advantage we can increase the length of effort arm.

**Solution 24.**

Diagram:

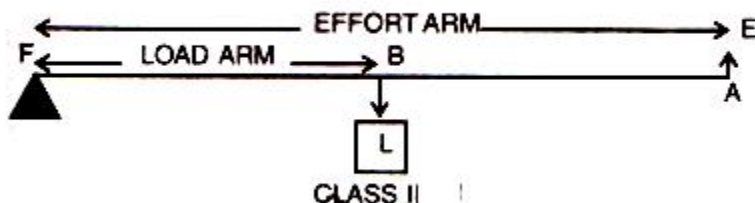


The effort arm is longer than load arm in such a lever.

**Solution 25.**

In these types of levers, the load L is in between the effort E and the fulcrum F. So, the effort arm is thus always longer than the load arm. Therefore  $M.A > 1$ .


**Solution 26.**

Diagram:

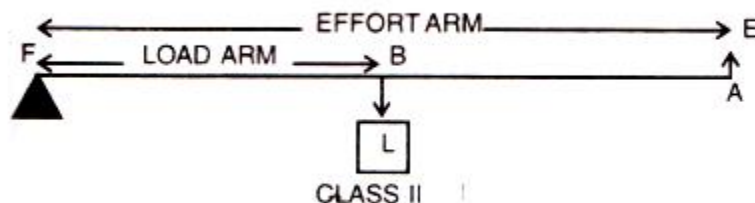

Example: a bottle opener.

**Solution 27.**

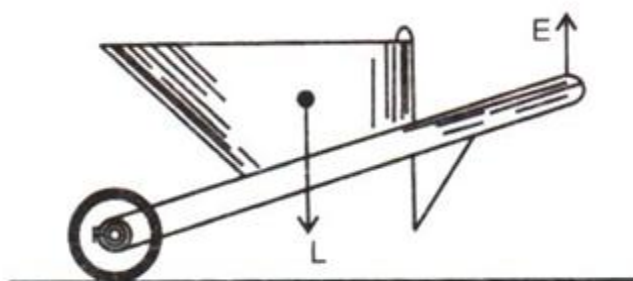


The wheel barrow is a class II lever. One more example of this class is a nut cracker.

**Solution 29.**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

Classes III levers always have mechanical advantage less than one.

Diagram:

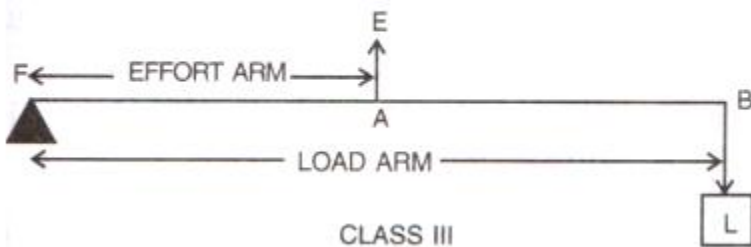

**Solution 30.**


In these types of levers, the effort is in between the fulcrum F and the load L and so the effort arm is always smaller than the load arm. Therefore  $M.A. < 1$ .

**Solution 31.**

With levers of class III, we do not get gain in force, but we get gain in speed, that is a longer displacement of load is obtained by a smaller displacement of effort.

**Solution 32.**

Diagram:

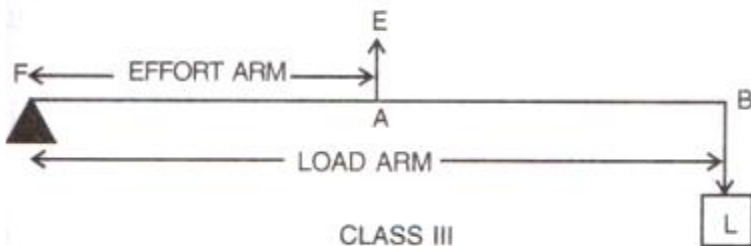


Examples: foot treadle.

**Solution 33.**


(a) A bottle opener is a lever of the second order, as the load is in the middle, fulcrum at one end and effort at the other.

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

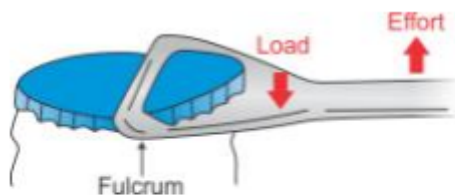

Bottle opener


(b) Sugar tongs is a lever of the third order as the effort is in the middle, load at one end and fulcrum at the other end.

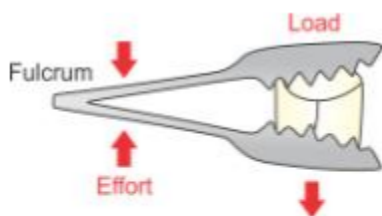

Sugar tongs

**Solution 34.**


(a) A seesaw

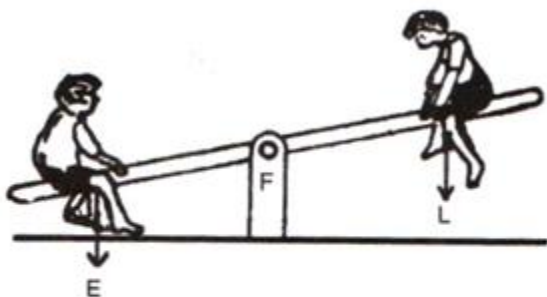


(b) A common balance



(c) A nut cracker

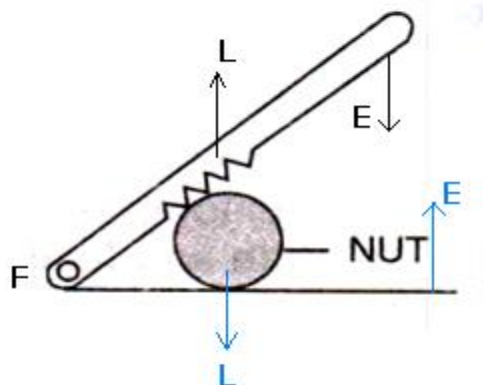

(d) Forceps

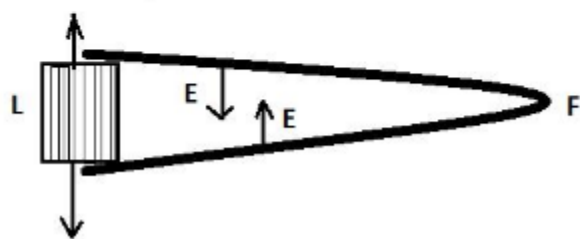

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>



**Solution 35.**

- a. Class II
- b. Class I
- c. Class II
- d. Class III

**Solution 36.**

- (a) Class III.

Here, the fulcrum is the elbow of the human arm. Biceps exert the effort in the middle and load on the palm is at the other end.




- (b) Class II.

Here, the fulcrum is at toes at one end, the load (i.e. weight of the body) is in the middle and effort by muscles is at the other end.



**Solution 37.**

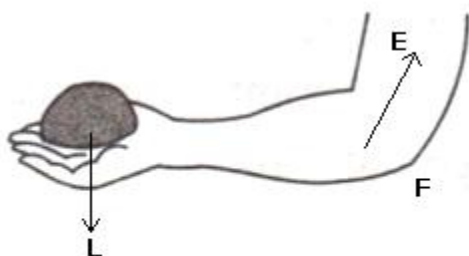

It is Class III lever.

**Solution 38.**

Class I lever in the action of nodding of the head: In this action, the spine acts as the fulcrum, load is at its front part, while effort is at its rear part.

Class II lever in raising the weight of the body on toes: The fulcrum is at toes at one end, the load is in the middle and effort by muscles is at the other end.

Class III lever in raising a load by forearm: The elbow joint acts as fulcrum at one end, biceps exerts the effort in the middle and a load on the palm is at the other end.

**Solution 1 (MCQ).**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

$$M.A. \times E = L$$

**Solution 2 (MCQ).**

$$M.A = V.R \times \eta$$

**Solution 3 (MCQ).**

It can have a mechanical advantage greater than the velocity ratio.

Reason: If the mechanical advantage of a machine is greater than its velocity ratio, then it would mean that the efficiency of a machine is more than 100%, which is practically not possible.

**Solution 4 (MCQ).**

Effort is between fulcrum and load

Hint: Levers, for which the mechanical advantage is less than 1, always have the effort arm shorter than the load arm.

**Solution 5 (MCQ).**

$$M.A > 1$$

Hint: In class II levers, the load is in between the effort and fulcrum. Thus, the effort arm is always longer than the load arm and less effort is needed to overcome a large load. Hence,  $M.A > 1$ .

**Numericals****Solution 1.**

Total length of crowbar = 120 cm

Load arm = 20 cm

Effort arm = 120 - 20 = 100 cm

$$\text{Mechanical advantage } M.A = \frac{\text{Effort arm}}{\text{Load arm}}$$

$$M.A = \frac{100}{20} = 5$$

**Solution 2.**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

Effort arm = 7.5 cm

Load arm = 15 cm

$$\text{Mechanical advantage MA} = \frac{\text{Effort arm}}{\text{Load arm}} = \frac{7.5}{15} = 0.5$$

### Solution 3.

Effort arm = 10 cm

Load arm = 5 cm

$$\text{Mechanical advantage MA} = \frac{\text{Effort arm}}{\text{Load arm}} = \frac{10}{5} = 2$$

Load = 5 kgf

$$\text{Effort} = \frac{\text{Load}}{\text{MA}} = \frac{5}{2} = 2.5 \text{ kgf}$$

### Solution 4.

(a) This is a class I lever.

(b) Given AB = 1 m, AF = 0.4 m and BF = 0.6 m


$$\text{Mechanical advantage MA} = \frac{BF}{AF} = \frac{0.6}{0.4} = 1.5$$

(c) Load = 15 kgf

$$\text{Effort} = \frac{\text{Load}}{\text{MA}} = \frac{15}{1.5} = 10 \text{ kgf}$$

### Solution 5.

Diagram:

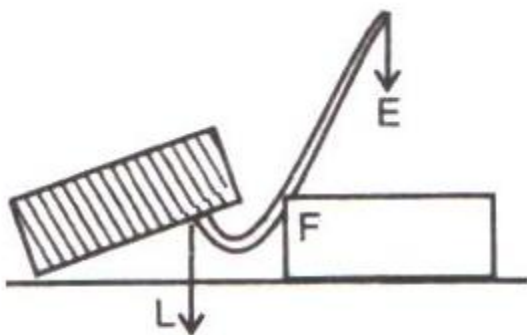

Crowbar is a class I lever.

(i) Total length of crowbar = 1.5 m

Effort arm = 1 m

Load arm = 1.5 - 1 = 0.5 m

(ii) Effort arm = 1 m

(iii) Mechanical advantage  $M.A = \frac{\text{Effort arm}}{\text{Load arm}} = \frac{1}{0.5} = 2$

(iv) The effort needed

$$\text{Effort} = \frac{\text{Load}}{M.A} = \frac{75}{2} = 37.5 \text{ kgf}$$

#### Solution 6.

Effort arm = 2 cm

Load arm = 8.0 cm

Given effort = 10 kgf

(i) Mechanical advantage  $M.A = \frac{\text{Effort arm}}{\text{Load arm}} = \frac{2}{8} = 0.25$

(ii) load =  $M.A \times \text{effort} = 0.25 \times 10 = 2.5 \text{ kgf}$

The pair of scissors acts as a speed multiplier because  $MA < 1$ .

#### Solution 7.

Total length of rod = 4 m = 400 cm

(a) 18 kgf load is placed at 60 cm from the support.

W kgf weight is placed at 250 cm from the support.

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

By the principle of moments

$$18 \times 60 = W \times 250$$

$$W = 4.32 \text{ kgf}$$

(b) Given  $W=5 \text{ kgf}$

18kgf load is placed at 60 cm from the support.

Let 5 kgf of weight is placed at d cm from the support.

By the principle of moments

$$18 \times 60 = 5 \times d$$

$$d = 216 \text{ cm from the support on the longer arm}$$

(c) It belongs to class I lever.

#### **Solution 9.**

(a) This is a class II lever.

(b) Given:  $FA=80 \text{ cm}$ ,  $AB = 20 \text{ cm}$ ,  $BF= FA+AB=100\text{cm}$

$$\text{Mechanical advantage } M.A = \frac{BF}{AF} = \frac{100}{80} = 1.25$$

$$(c) \text{Effort (E)} = \frac{\text{Load (L)}}{M.A} = \frac{5}{1.25} = 4\text{kgf}$$

#### **Solution 10.**

(a) (i) Load arm  $AF=20 \text{ cm}$

(ii) Effort arm  $CF=60 \text{ cm}$

$$(iii) \text{Mechanical advantage } M.A = \frac{CF}{AF} = \frac{60}{20} = 3$$

(iv) Total load  $=30+15 = 45 \text{ kgf}$

$$\text{Effort} = \frac{\text{Load}}{M.A} = \frac{30+15}{3} = 15\text{kgf}$$

#### **Solution 11.**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

(a) The principle of moments: Moment of the load about the fulcrum = moment of the effort about the fulcrum

$$FB \times \text{Load} = FA \times \text{Effort}$$

(b) Sugar tongs the example of this class of lever.

(c) Given:  $FA = 10 \text{ cm}$ ,  $AB = 500 \text{ cm}$ ,  $BF = 500 + 10 = 510 \text{ cm}$ .

The mechanical advantage

$$M.A = \frac{AF}{BF} = \frac{10}{510} = \frac{1}{51}$$

The minimum effort required to lift the load

$$\text{Effort} = \frac{\text{Load}}{M.A} = \frac{50}{\frac{1}{51}} = 2550 \text{ N}$$

### Solution 12.

Fire tongs has its arms = 20 cm

Effort arm = 15 cm

Load arm = 20 cm

$$(i) \text{Mechanical advantage } M.A = \frac{\text{Effort arm}}{\text{Load arm}} = \frac{15}{20} = 0.75$$

$$(ii) \text{Effort} = \frac{\text{Load}}{M.A} = \frac{1.5}{0.75} = 2.0 \text{ kgf.}$$

### Exercise 3(B)

#### Solution 1.

Fixed pulley: A pulley which has its axis of rotation fixed in position, is called a fixed pulley.

Single fixed pulley is used in lifting a small load like water bucket from the well.

#### Solution 2.

The ideal mechanical advantage of a single fixed pulley is 1.

It cannot be used as force multiplier.

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

**Solution 3.**

There is no gain in mechanical advantage in the case of a single fixed pulley. A single fixed pulley is used only to change the direction of the force applied that is with its use, the effort can be applied in a more convenient direction. To raise a load directly upwards is difficult.

**Solution 4.**

The velocity ratio of a single fixed pulley is 1.

**Solution 5.**

The load rises upwards with the same distance  $x$ .

**Solution 6.**

Single movable pulley: A pulley, whose axis of rotation is not fixed in position, is called a single movable pulley.

Mechanical advantage in the ideal case is 2.

**Solution 8.**

The efficiency of a single movable pulley system is not 100% this is because


1. The friction of the pulley bearing is not zero ,
2. The weight of the pulley and string is not zero.

**Solution 9.**

The force should be in upward direction.

The direction of force applied can be changed without altering its mechanical advantage by using a single movable pulley along with a single fixed pulley to change the direction of applied force.

Diagram:

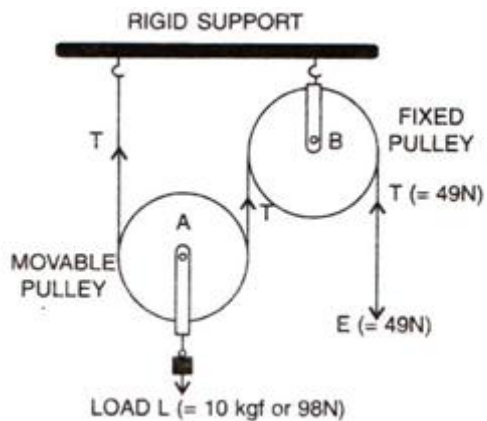

**Solution 10.**


The velocity ratio of a single movable pulley is always 2.

**Solution 11.**

The load is raised to a height of  $x/2$ .

**Solution 12.**


Diagram:

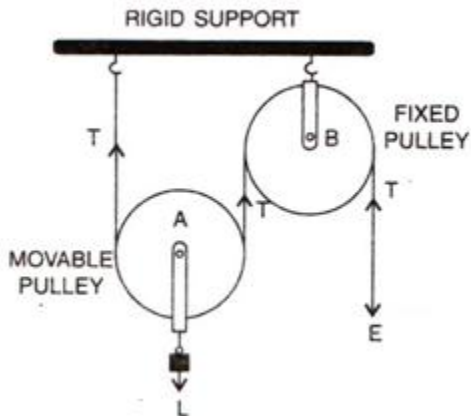

Ideal mechanical advantage of this system is 2. This can be achieved by assuming that string and the pulley are massless and there is no friction in the pulley bearings or at the axle or between the string and surface of the rim of the pulley.

**Solution 13.**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

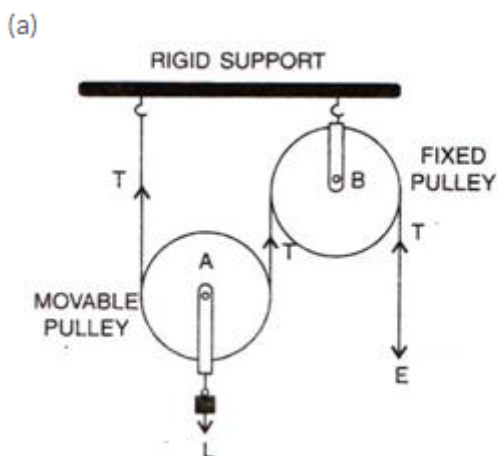

(b) The fixed pulley B is used to change the direction of effort to be applied from upward to downward.

(c) The effort E balances the tension T at the free end, so  $E=T$

(d) The velocity ratio of this arrangement is 2.

(e) The mechanical advantage is 2 for this system (if efficiency is 100%).

#### Solution 14.

##### Single fixed pulley

1. It is fixed to a rigid support.
2. Its mechanical advantage is one.
3. Its velocity ratio is one.
4. The weight of pulley itself does not affect its mechanical advantage.
5. It is used to change the direction of effort


##### Single movable pulley

1. It is not fixed to a rigid support.
2. Its mechanical advantage is two.
3. Its velocity ratio is two.
4. The weight of pulley itself reduces its mechanical advantage.
5. It is used as force multiplier.

#### Solution 15.

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>


- (a) Pulleys A and B are movable pulleys. Pulley C is fixed pulley.  
 (b)

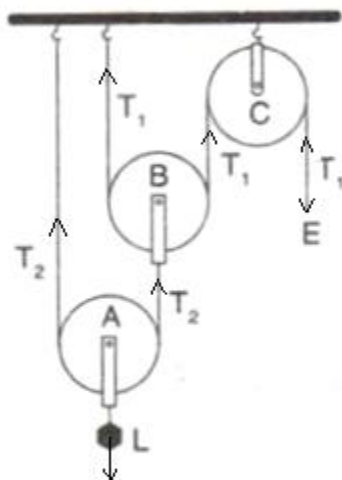

- (c) The magnitude of effort  $E = T_1$   
 And the magnitude of  $L = 2^2 T_1 = 4 T_1$   
 (d) The mechanical advantage  $= 2^2 = 4$   
 The velocity ratio  $= 2^2 = 4$   
 (e) Assumption: the pulleys A and B are weightless.

**Solution 16.**

Diagram:

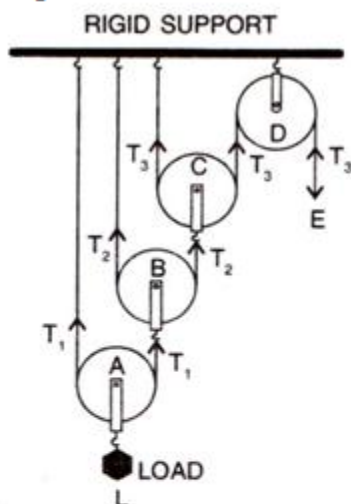

Tension  $T_1$  in the string passing over the pulley A is given as

$$2T_1 = L \text{ or } T_1 = L/2$$

Tension  $T_2$  in the string passing over the pulley B is given as

$$2T_2 = T_1 \text{ or } T_2 = T_1/2 = L/2^2$$

Tension  $T_3$  in the string passing over the pulley C is given as

$$2T_3 = T_2 \text{ or } T_3 = T_2/2 = L/2^3$$

In equilibrium,  $T_3 = E$

$$E = L/2^3$$

$$\text{Mechanical advantage} = MA = L/E = 2^3$$

As one end of each string passing over a movable pulley is fixed, so the free end of string moves twice the distance moved by the movable pulley.


If load  $L$  moves up by a distance  $x$ ,  $d_L = x$ , effort moves by a distance  $2^3x$ ,  $d_E = 2^3x$

$$\text{Velocity Ratio } VR = \frac{\text{Distance moved by the effort } d_E}{\text{Distance moved by the load } d_L} = \frac{2^3x}{x} = 2^3$$

$$\text{Efficiency} = MA/VR = 2^3/2^3 = 1 \text{ or } 100\%$$

**Solution 17.**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

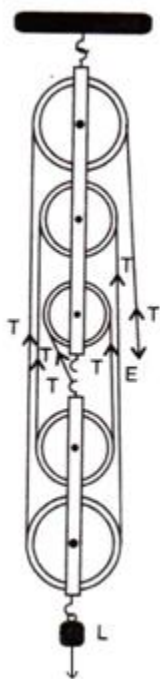**Solution 18.**

1. In a single fixed pulley, some effort is wasted in overcoming friction between the strings and the grooves of the pulley; so the effort needed is greater than the load and hence the mechanical advantage is less than the velocity ratio.
2. This is because some effort is wasted in overcoming the friction between the strings and the grooves of the pulley.
3. This is because mechanical advantage is equal to the total number of pulleys in both the blocks.
4. The efficiency depends upon the mass of lower block; therefore efficiency is reduced due to the weight of the lower block of pulleys.

**Solution 19.**

- (a) Multiply force: a movable pulley.
- (b) Multiply speed: gear system or class III lever.
- (c) Change the direction of force applied: single fixed pulley.

**Solution 20.**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

1. The velocity ratio of a single fixed pulley is always more than 1.(false)
2. The velocity ratio of a single movable pulley is always 2.(true)
3. The velocity ratio of a combination of n movable pulleys with a fixed pulley is always  $2^n$ .(true)
4. The velocity ratio of a block and tackle system is always equal to the number of strands of the tackle supporting the load. (true)

**Solution 1 (MCQ).**


It helps in applying effort in a convenient direction.

Explanation: A single fixed pulley though does not reduce the effort but helps in changing the direction of effort applied. As it is far easier to apply effort in downward direction, the single fixed pulley is widely used.

**Solution 2 (MCQ).**

The mechanical advantage of an ideal single movable pulley is 2.

Derivation: Consider the diagram given below:

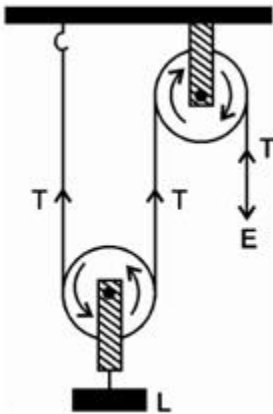

Here the load L is balance by the tension in two segments of the string and the effort E balances the tension T at the free end, so

$$L = T + T = 2T \text{ and } E = T$$

Assumption: Weight of the pulley is negligible.

We know that,

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

$$M.A. = \frac{\text{Load (L)}}{\text{Effort (E)}} = \frac{2T}{T} = 2$$

Thus, a single movable pulley has a M.A. equal to 2.

### Solution 3 (MCQ).

Force multiplier

Explanation: The mechanical advantage of movable pulley is greater than 1. Thus, using a single movable pulley, the load can be lifted by applying an effort equal to half the load (in ideal situation), i.e. the single movable pulley acts as a force multiplier.

### Numericals

#### Solution 1.

The force applied by the women is = 70 N

The mass of bucket and water together is = 6 kg

Total load =  $6 \times 10 = 60$  N

$$\text{Mechanical advantage } M.A. = \frac{\text{load}}{\text{effort}} = \frac{60}{70} = 0.857$$

#### Solution 2.

Load = 500 kgf

Mass of falling object = 100 kg

Displacement of effort = 8.0 m

Time taken = 4.0 s

(a) Effort =  $100 \times 10 = 1000$  kgf

$$\text{Power Input} = \frac{\text{displacement} \times \text{effort}}{\text{time}} = \frac{8 \times 1000}{4} = 2000 \text{ W}$$

(b) The efficiency of the pulley is = 75% = 0.75

$$\text{Mechanical advantage of this system } M.A. = \frac{\text{load}}{\text{effort}} = \frac{500}{100} = 5$$

$$\text{Velocity ratio of this system } V.R. = \frac{M.A.}{\eta} = \frac{5}{0.75} = \frac{20}{3}$$

$$\text{Displacement of load } D = \frac{\text{displacement of effort}}{V.R.} = \frac{3 \times 8}{20} = 1.2 \text{ m}$$

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

**Solution 3.**

Load = 75 kgf  
Effort = 25 kgf  
 $n = 3$

$MA = \text{Load}/\text{Effort} = 75/25 = 3$   
or  $MA = n = 3$

velocity ratio  $VR = n = 3$

Efficiency  $\eta = \frac{MA}{VR} = \frac{3}{3} = 1$  or 100%

**Solution 4.**


A block and tackle system has 5 pulleys. ( $n = 5$ )  
Effort = 1000 N  
Load = 4500 N

(a) The mechanical advantage  $MA = \frac{\text{load}}{\text{effort}} = \frac{4500}{1000} = 4.5$

(b) The velocity ratio  $= n = 5$

(c) The efficiency of the system  $\eta = \frac{MA}{V.A} = \frac{4.5}{5} = 0.9$  or 90%

**Solution 5.**

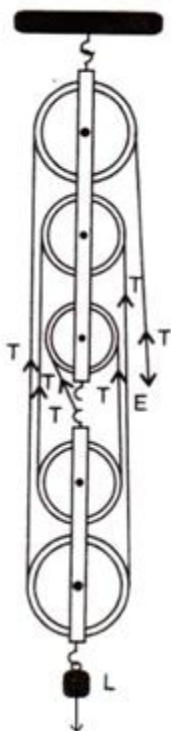


(a) The effort move =  $1 \times 5 = 5\text{m}$

(b) Five strands of tackle are supporting the load.

(c) Mechanical advantage of the system =  $M.A = \frac{\text{load}}{\text{effort}} = \frac{5T}{T} = 5$

**Solution 6.**

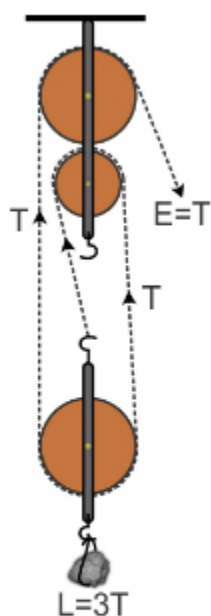

A pulley system has a velocity ratio =3


Efficiency of system= 80 % =0.8

Mechanical advantage of the system  $M.A = V.A \times \eta = 3 \times 0.8 = 2.4$

Effort required to raise the load=  $\text{Effort} = \frac{\text{Load}}{M.A} = \frac{300}{2.4} = 125\text{N}$

**Solution 7.**

(a)

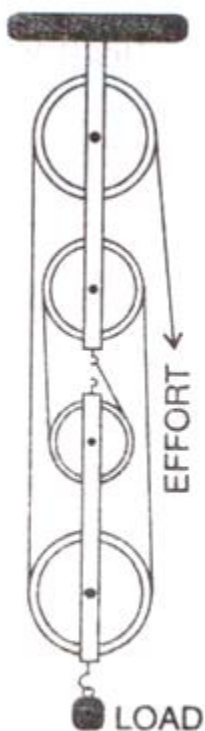

(b) Velocity ratio of the system =  $n = 4$

(c) The relation between load and effort

$$MA = \frac{\text{load}}{\text{effort}} = n = 4$$

$$\text{load} = 4 \times \text{effort}$$


(d) (i) There is no friction in the pulley bearings, (ii) weight of lower pulleys is negligible and (iii) the effort is applied downwards.

**Solution 8.**

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

(a) There are 4 strands of tackle supporting the load.

(b)

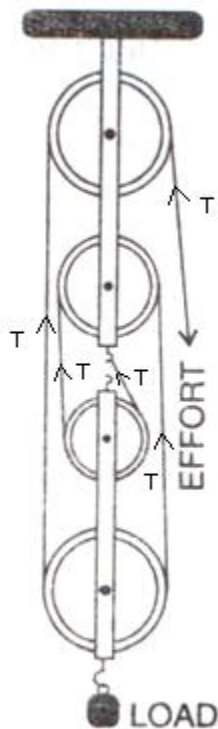


(c) The mechanical advantage of the system

$$M.A = \frac{\text{load}}{\text{effort}} = \frac{4T}{T} = 4$$

(d) When load is pulled up by a distance 1 m, the effort end will move by a distance =  $1 \times 4 = 4\text{m}$ .

**Solution 9.**

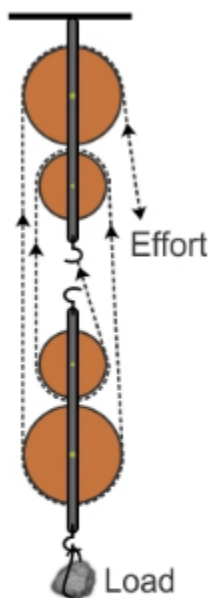

A block and tackle system has the velocity ratio= 3

i.e.,  $VR = n = 3$


Efficiency of system  $\eta = 60\% = 0.6$

The mechanical advantage of the system  $M.A = V.R \times \eta = 3 \times 0.6 = 1.8$

Man can exert a maximum effort= 200 kgf

load =  $M.A \times \text{effort} = 1.8 \times 200 = 360\text{kgf}$

**Solution 10.**

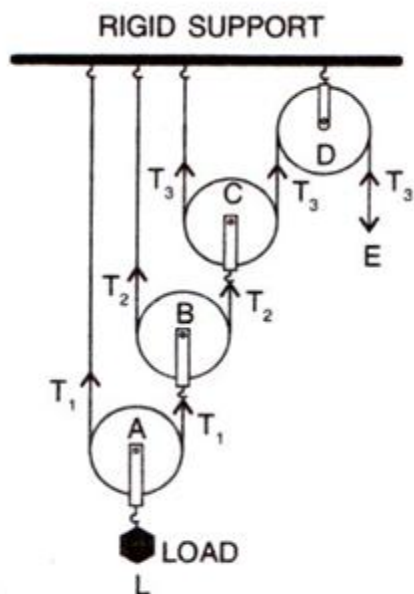

Assumptions: (i) There is no friction in the pulley bearing, (ii) the pulleys and the string are massless.



# Selina Publishers ICSE Solutions

## Class 10 Physics

- Chapter 1- Force
- Chapter 2- Work, Energy and Power
- Chapter 3- Machines
- Chapter 4- Refraction of Light at Plane Surfaces
- Chapter 5- Refraction through Lens
- Chapter 6- Spectrum
- Chapter 7- Sound
- Chapter 8- Current Electricity
- Chapter 9- Electrical Power and Household Circuits
- Chapter 10- Electro Magnetism
- Chapter 11- Calorimetry
- Chapter 12- Radioactivity

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

## About About Selina Publishers ICSE

Selina Publishers has been serving the students since 1976 and is one of the quality ICSE school textbooks publication houses. Mathematics and Science books for classes 6-10 form the core of our business, apart from certain English and Hindi literature as well as a few primary books. All these books are based upon the syllabus published by the Council for the I.C.S.E. Examinations, New Delhi. The textbooks are composed by a panel of subject experts and vetted by teachers practising in ICSE schools all over the country. Continuous efforts are made in complying with the standards and ensuring lucidity and clarity in content, which makes them stand tall in the industry.

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>

## About IndCareer

IndCareer.com is a leading developer of online career guidance resources for the Indian marketplace. Established in 2007, IndCareer.com is currently used by over thousands of institutions across India, including schools, employment agencies, libraries, colleges and universities.

IndCareer.com is designed to assist you in making the right career decision - a decision that meets your unique interests and personality.

For any clarifications or questions you can write to **info@indcareer.com**

### Postal Address

IndCareer.com  
52, Shilpa Nagar,  
Somalwada  
Nagpur - 440015  
Maharashtra, India

**WhatsApp:** +91 9561 204 888

**Website:** <https://www.indcareer.com>

<https://www.indcareer.com/schools/selina-class-10-icse-solutions-physics-chapter-3-machines/>